Order number: 01 229 06 99

SCHELL electronic wash basin mixer CELIS E HD-M

(high-pressure mixed water) battery operation, suitable for connection with SWS,
capable of beeing parameterised by SSC
vandal-resistant all-metal design

Scope of delivery:

- compact infrared sensor single hole tap with temperature controller
- electronic module programmable
- connection cable (250 mm) with plug protection class IP 65
- cartridge solenoid valve 6 V
- external battery compartment with mit 4 x 1,5 V Mignon AA, ca. 210 mm connection cable (250 mm) with plug protection class IP 65
- 2 flexible connection hoses Clean-Fix S G 3/8 internal thread x 380 mm with integrated backflow preventer (RV, DIN EN 1717:EB) and pre-filter
- flow regulator
- wash basin mounting accessories

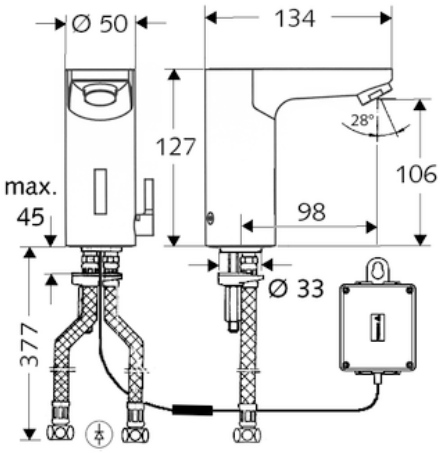

Field of application / Technical data:

- Flow volume: max. 5 l/min independent of pressure
- Flow pressure: 1 to 5 bar
- Max. resting pressure 8 bar
- Water temperature max. 70°C (80°C permissible for 10 min./day)
- adjustable hand programming
  - sensor range: short, medium, long
  - stagnation flush program (duration of flow 30 s, 24 h after last use/ every 24 h)
  - flow time of continuous flush for thermal disinfection (duration of flow 300 s / duration of flow 120 s)
  - cleaning stop 60 s
- flow time adjustment via SWS/SSC
  - max. flow time 1 - 360 s
  - post-run time 0,6 - 60 s
  - stagnation flush time 5 - 600 s
  - stagnation flush intervals 1 - 240 h
  - flow time for thermal disinfection 15 - 600 s
  - duration of flow 15 - 600 s
  - energy saving mode activated 1 - 254 h
  - cleaning stop 60 - 360 s

Details:

- Material: housing out of brass conform German drinking water regulation
- Noise Class: I
- Surface: chrome
- Weight: 2.14 kg/pc.
- Packaging unit: 1

Recommended associated item:

extension cable 1,5 m	Order No.: 51 010 00 99	
angle valve thermostat	Order No.: 09 406 06 99	
angle valve with regulating function COMFORT with filter	Order No.: 05 430 06 99	or

SCHELL GmbH & Co. KG Armaturentechnologie · Raiffeisenstraße 31 · 57462 Olpe · Germany
Tel. +49 2761 892-0 · Fax +49 2761 892-199 · info@schell.eu · www.schell.eu

02.04.2020

sampling angle valve	Order No.: 03 835 06 99
Pressure Balance Valve PBV	Order No.: 06 558 12 99
SSC USB-adapter	Order No.: 01 586 00 99