

Order number: 02 477 06 99

SCHELL exposed urinal flush valve, DN 15 SCHELLOMAT Basic SV



robust all-metal flush valve with brass push button.

High reliability thanks to plastic cartridge

and integrated jet bore pre-filter.

Flush valve according to EN 12541.

With integrated isolating valve

Scope of delivery:

- exposed urinal flush valve
- flush pipe \varnothing 18 x 193 mm
- push rosette
- Urinal inner connector

Field of application / Technical data:

- flow volume: 0,3 l/s
- flow pressure: 0,8 - 5,0 bar
- flush volume adjustable 1 – 6 l


Details:

- Material: all parts in contact with water out of brass conform German drinking water regulation, functioning parts cartridge plastic
- Test Mark: PA-IX 9892/II, DIN-DVGW certified, WELL Public
- Surface: chrome
- Weight: 0.72 kg/pc.
- Packaging unit: 1
- Dimension: DN 15 G 1/2 ext. thread

Versions:

Dimension: DN 15 G 1/2 ext. thread
chrome, PU 1, W: 0.7 kg/pc.

Order No.: [02 476 06 99](#)

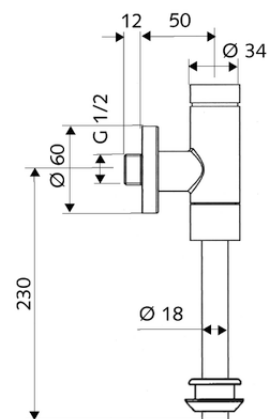

Recommended associated item:

Flush pipe \varnothing 18 mm

Order No.: [50 722 06 99](#) or

Flush pipe \varnothing 18 mm edged

Order No.: [50 223 06 99](#) or

Flush pipe \varnothing 18 mm edged

Order No.: [50 291 06 99](#)

Urinal external connector

Order No.: [27 820 06 99](#)