




BILIGHT

GCV 80 44 15 B11 TSR

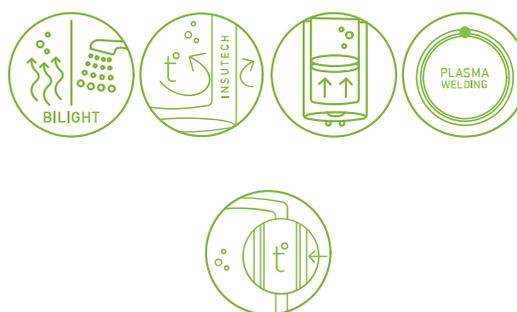

Model	BiLight 80
Real Volume	82 L
Rated power	1500 W
Heating time Δt 45K (15 - 60°C)**80°C	2:08 h:min
Annual consumption of electricity AEC	2762 kWh
Energy class	C
Height	0.845 m
Width	0.440 m
Depth	0.467 m
Diameter	440 mm
Mounting	Vertical
Load profile	L



V40	145 L
T _{out of the box}	70 °C
MAX40	145 L



The water heaters of the BiLight series have been developed in conformity with the highest European safety standards and quality requirements. The product range offers models with storage capacity of 50 to 150 litres.

- PISTON EFFECT for control of the speed of incoming water and increase of the hot water amount with up to 15%
- INSUTECH - an in-house TESI technology for highly efficient insulation and extremely low heat losses
- BiLight indication for easy and fast recognition of the work modes
- Electric on/off switch
- Freeze protection
- Glass-ceramic coating for corrosion protection
- Plasma-arc welding of the water tank for extended useful life