

ARTIKAL
Item


JK341001

Baterija za kadu - lavabo sa ručnim tušem
Bath & basin mixer, wall type with shower set

SLIKA PROIZVODA Product picture



TEHNIČKA SKICA Technical draft

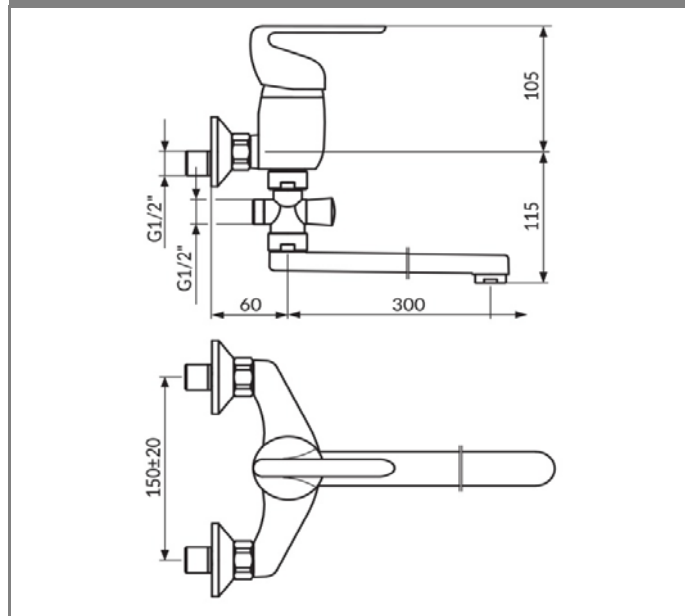

TEHNIČKI PODACI

Jednoručna baterija
Zidna montaža
Klasa protoka C -na izlivu
Regulacija protoka do 5 lit/min na tušu
NEOPERL® PERLATOR® HONEYCOMB
Keramički mešač KEROX® 40 HWS
Liveni izliv 300mm sa integrisanim prebacivačem
Ručni prebacivač za tuš
Duplo pleteno tuš crevo 1.5m
Easy Clean tuš ručica
Heavy Duty ekscentar kolena
Hromirane rozete
Klasa bučnosti II

RADNI USLOVI

Maksimalni radni pritisak: 5 bar
Preporučeni radni pritisak: 3 bar
Minimalni radni pritisak: 1 bar
Maksimalna dozvoljena temperatura: 80°C
Preporučena temperatura vode: 60°C

TECHNICAL DETAILS

Single lever mixer
Wall mounted
Flow class C - on spout
Flow regulation on shower up to 5 lit/min
Aerator NEOPERL® PERLATOR® HONEYCOMB
Ceramic cartridge KEROX® 40 HWS
Casted spout 300mm with built in diverter
Manual shower diverter
Double lock shower hose 1.5m
Easy Clean hand shower
Heavy Duty eccentric connectors
Chromed rossete
Noise level II

WORKING CONDITIONS

Max. working pressure : 5 bar
Suggested working pressure : 3 bar
Min. working pressure : 1 bar
Max. working temperature : 80°C
Suggested max. water temperature : 60°C

www.rosan.rs

Srbija, 24420 Kanjiža, Dušana Popovića 10.

tel.+381 24-876-744 fax +381 24-876-756, info@rosan.rs

KING PLUS