

HL138


In-wall siphon for condensate water for air conditioners DN32 - 100x100mm



Flush mounted stench trap for air condition condensate water for drainage of condensate water to the sewer. Cleanable cartridge, which is save against running dry. Connectable to pipes and tubes from Ø 20 - 32 mm (Minimum inner diameter continuous 18mm). Lot cover, which is adjustable by cutting to the installation depth. Minimum installation depth 60mm.



Techn. drawing

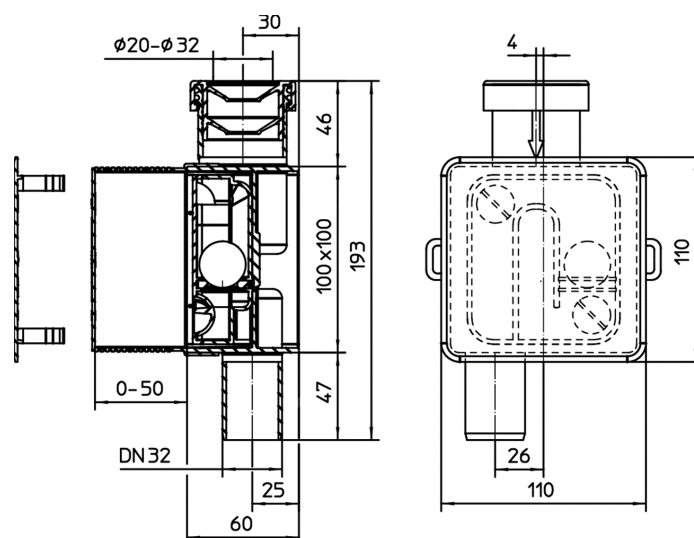

TECHNICAL DATA

material	PP/ABS	installation height
dimension	DN32	grate frame
capacity	120 l/h	grate
weight	0,28	load class

EAN

9003076030705

inlet

Ø 20 - 30 mm

standards

DIN19541

MAIN DATA**spare parts****HL01096D**

Gasket 20-32mm for HL138

**HL01097D**

2 x Gasket for cartridge of HL138 15-22mm

**HL0138.1E**

Lot cover

**HL0138.2E**

Cover plate

**HL0138.3E**

siphon cartridge

**HL01097D**

2 x Gasket for cartridge of HL138 15-22mm

**HL138K**

Drain body for in-wall siphon for condensate water/ 100x100mm

**HL01096D**

Gasket 20-32mm for HL138

attachment**HL0138.HE**

Hygienic adapter for HL138

Alternatives**HL138H**

In-wall siphon for condensate water with hygienic adapter

PACKAGING DATA**PE-bag**

unit	1 [pcs.]
weight	0,286 [kg]
EAN/pack.	9003076030705
height/width/depth	120/120/200 [mm]
volume	0 [m³]

carton

unit	10 [pcs.]
------	-----------

weight	3,223 [kg]
EAN/pack.	9003076030996
height/width/depth	320/250/410 [mm]
volume	0,006402 [m³]

single use pallet

unit	450 [pcs.]
weight	155,5 [kg]
EAN/pack.	
height/width/depth	1800/800/1250 [mm]
volume	1,728 [m³]

DOWNLOADS

Foto Print	HL138_pr.tif	max.
Foto Web	HL138_B.jpg	640x480/300dpi
Foto Parts List	HL138_gr.jpg	150x150/72dpi
Techn. drawing	HL138_a.pdf	pdf
CAD	HL138_2_a.dxf	dxf
example of use	HL138_PZ.pdf	pdf