

HL406


recessed washing device trap DN40/50 with water feed and on/off tap R 1/2' - 180x100mm



recessed washing device trap DN40/50 with water feed and on/off tap 1/2' with non-return valve, appliance hose connector 3/4' chrome plated HL19.C, mounting plate and stainless steel coverplate 180 x 100 mm. Minimum installation depth 75 mm. Comes with lot cover.



Techn. drawing

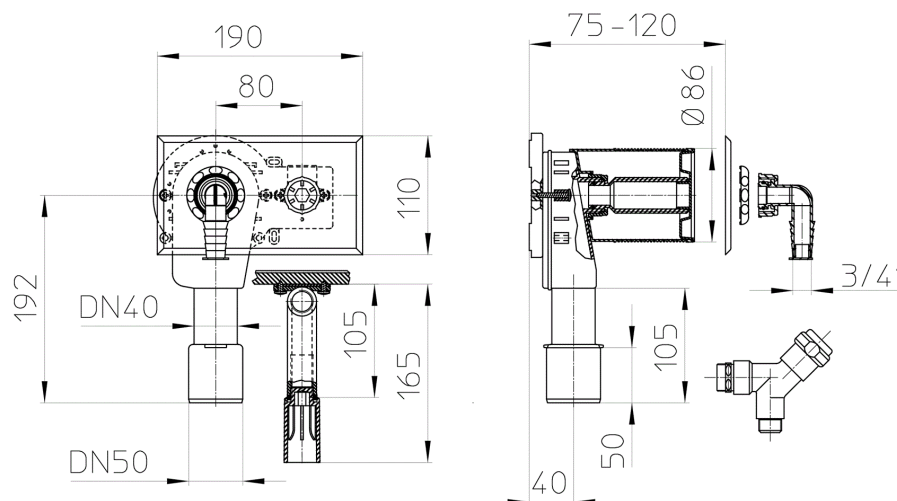

TECHNICAL DATA

material	PE	installation height
dimension	DN40/50	grate frame
capacity	0,38 l/s	grate
weight	1,075	load class

EAN

9003076504060

inlet

standards

DIN19541, DIN1988

MAIN DATA

spare parts



HL0405.1E

stainless steel plate 180x100mm



HL0405.2E

mounting plate



HL0405.8E

screws with noise insulation



HL0405.3E

water feed solid brass 1/2'x1/2'



HL0405.4E

lot-cover



HL0406.1E

on/off valve 1/2'



HL19.C

appliance hose connector 1'x3/4' chrome plated, O-ring



HL01050D

O-ring 18x2,5mm



HL0400.7E

plug



HL42.B

test plug 1/2' with vent. Blue



HL042.1D

gasket 1/2'



HL420

threaded extension 1'x68mm



HL01050D

O-ring 18x2,5mm

attachment



HL19

appliance hose connector 1'x3/4', O-ring



HL19.2

appliance hose connector 1'x8-13mm, O-ring



HL2

appliance hose twin connector with non-return valve. O-ring



HL2.1

appliance hose twin connector with non-return and air-admittance valve. O-ring

**HL405B**

adjustable strap

Alternatives**HL406.2**

recessed washing device trap DN40/50 with 2 water feeds and on/off taps 1/2" - 280x100mm

PACKAGING DATA**PE-bag**

unit	1 [pcs.]
weight	1,088 [kg]
EAN/pack.	9003076504060
height/width/depth	140/200/200 [mm]
volume	0 [m³]

carton

unit	1 [pcs.]
weight	1,237 [kg]
EAN/pack.	9003076504060
height/width/depth	155/205/205 [mm]
volume	0,006513875 [m³]

single use pallet

unit	240 [pcs.]
weight	307 [kg]
EAN/pack.	
height/width/depth	1800/800/1200 [mm]
volume	1,728 [m³]

DOWNLOADS

Foto Print	HL406_pr.tif	max.
Foto Web	HL406_B.jpg	640x480/300dpi
Foto Parts List	HL406_gr.jpg	150x150/72dpi
Techn. drawing	HL406_c.pdf	pdf
CAD	HL406_c1.dxf	dxf
example of use	HL406_PZ.pdf	pdf