

HL66.9


grating d 145mm fluted/148x148mm/138x138mm



grating 90 mm fluted / d 145 mm / 148 x 148 mm with
stainless steel grate 138 x 138 mm. Total height 90 mm,
frame height 10 mm



techn. drawing

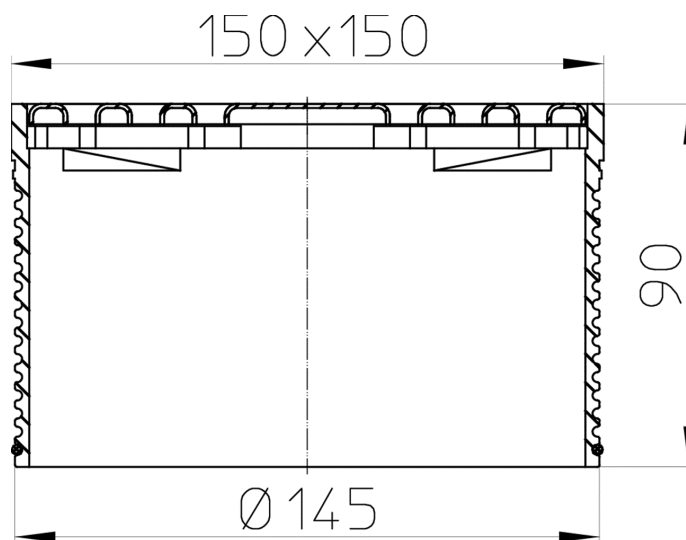

MAIN DATA

spare parts



HL0317.1E

stainless steel grate 138x138mm



HL062B.2E

grate frame d 145mm/90mm/148x148mm

**HL066.4E**

O-ring 135x2,5mm

attachment**HL062B.3E**

adapter

**HL160**

gravel guard d 150mm

Extensions**HL350**

extension 130mm/d 145mm

**HL350.1**

extension 180mm/d 145mm with flange and waterproofing kit HL84

**HL350.1H**

extension 180mm/d 145mm with bitumen membrane

**HL65**

extension 300mm/d 125mm with clamping ring

**HL65H**

extension 300mm/d 125mm with bitumen membrane

**HL65P**

extension 345mm/d 125mm with PVC collar

used with**HL62.1B/1**

flat-roof drain DN110 with clamping ring, heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL62.1B/2**

flat-roof drain DN125 with clamping ring, heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL62.1B/5**

flat-roof drain DN160 with clamping ring, heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL62.1B/7**

flat-roof drain DN75 with clamping ring, heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL62.1BF/1**

Flat-roof drain DN110 vertical with PP-flange and heating /10-30W/230V), walkable

**HL62.1BF/2**

Flat-roof drain DN125 vertical with PP-flange and heating /10-30W/230V), walkable

**HL62.1BF/7**

Flat-roof drain DN75 vertical with PP-flange and heating /10-30W/230V), walkable

**HL62.1BH/1**

flat-roof drain DN110 with bitumen membrane, heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL62.1BH/2**

flat-roof drain DN125 with bitumen membrane, heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL62.1BH/5**

flat-roof drain DN160 with bitumen membrane, heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL62.1BH/7**

flat-roof drain DN75 with bitumen membrane, heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL62.1BP/1**

flat-roof drain DN110 with PVC collar, heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL62.1BP/2**

flat-roof drain DN110 with PVC collar, heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL62.1BP/5**

flat-roof drain DN160 with PVC collar, heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL62.1BP/7**

flat-roof drain DN75 with PVC collar, heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL62B/1**

flat-roof drain DN110 with clamping ring. Walkable - 148x148mm/137x137mm

**HL62B/2**

flat-roof drain DN125 with clamping ring. Walkable - 148x148mm/137x137mm

**HL62B/5**

flat-roof drain DN160 with clamping ring. Walkable - 148x148mm/137x137mm

**HL62B/7**

flat-roof drain DN75 with clamping ring. Walkable - 148x148mm/137x137mm

**HL62BF/1**

Flat-roof drain DN110 vertical with PP-flange, walkable. Frame 137mm x 137mm, grate 148mm x 148mm.

**HL62BF/2**

Flat-roof drain DN125 vertical with PP-flange, walkable. Frame 137mm x 137mm, grate 148mm x 148mm.

**HL62BF/7**

Flat-roof drain DN75 vertical with PP-flange, walkable. Frame 137mm x 137mm, grate 148mm x 148mm.

**HL62BH/1**

flat-roof drain DN110 with bitumen membrane. Walkable - 148x148mm/137x137mm

**HL62BH/2**

flat-roof drain DN125 with bitumen membrane. Walkable - 148x148mm/137x137mm

**HL62BH/5**

flat-roof drain DN160 with bitumen membrane. Walkable - 148x148mm/137x137mm

**HL62BH/7**

flat-roof drain DN75 with bitumen membrane. Walkable - 148x148mm/137x137mm

**HL62BP/1**

flat-roof drain DN110 with PVC collar. Walkable - 148x148mm/137x137mm

**HL62BP/2**

flat-roof drain DN125 with PVC collar. Walkable - 148x148mm/137x137mm

**HL62BP/5**

flat-roof drain DN160 with PVC collar. Walkable - 148x148mm/137x137mm

**HL62BP/7**

flat-roof drain DN75 with PVC collar. Walkable - 148x148mm/137x137mm

**HL64.1B**

flat-roof drain DN75/110 horizontal with clamping ring heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL64.1BF/1**

Flat-roof drain DN110 horizontal with PP-flange and heating /10-30W/230V), walkable

**HL64.1BF/7**

Flat-roof drain DN75 horizontal with PP-flange and heating /10-30W/230V), walkable

**HL64.1BH**

flat-roof drain DN75/110 horizontal with bitumen membrane heated (10-30W/230V). Walkable - 148x148mm/137x137mm

**HL64.1BP/1**

Flat-roof drain DN110 horizontal with PVC-flange and heating /10-30W/230V), walkable

**HL64.1BP/7**

Flat-roof drain DN75 horizontal with PVC-flange and heating /10-30W/230V), walkable

**HL64B**

flat-roof drain DN75/110 horizontal with clamping ring. Walkable - 148x148mm/137x137mm

**HL64BF/1**

Flat-roof drain DN110 horizontal with PP-flange, walkable. Frame 137mm x 137mm, grate 148mm x 148mm.

**HL64BF/7**

Flat-roof drain DN75 horizontal with PP-flange, walkable. Frame 137mm x 137mm, grate 148mm x 148mm.

**HL64BH**

flat-roof drain DN75/110 horizontal with bitumen membrane. Walkable - 148x148mm/137x137mm

**HL64BP/1**

Flat-roof drain DN110 horizontal with PVC-flange, walkable. Frame 137mm x 137mm, grate 148mm x 148mm.

**HL64BP/7**

Flat-roof drain DN75 horizontal with PVC-flange, walkable. Frame 137mm x 137mm, grate 148mm x 148mm.

**HL72N**

basement drain DN110 horizontal 148x148mm/138x138mm

**HL72N/7**

basement drain DN75 horizontal 148x148mm/138x138mm

TECHNICAL DATA

material	PP	installation height	90mm
dimension	d 145mm	grate frame	147x147mm
capacity		grate	Edelstahl 138x138mm
weight	0,345	load class	K - 300kg
EAN	9003076014606	inlet	
		standards	

PACKAGING DATA**PE-bag**

unit	1 [pcs.]
weight	0,352 [kg]
EAN/pack.	9003076014606
height/width/depth	100/160/160 [mm]
volume	0 [m³]

DOWNLOADS

Foto Print	HL66_9_pr.tif	max.
Foto Web	HL66_9_B.jpg	640x480/300dpi
Foto Symbol	HL66_9_gr.jpg	150x150/72dpi
techn. drawing	HL66_9_a.pdf	pdf
CAD	HL66_9_2_a.dxf	dxf