


HL800/125


Sealing kit for pipe inflow channels DN125 with bitumene membrane.



Sealing kit/pipe inflow channel for pipes (plastic, cast iron, stainless steel) d125-130mm. Used at wall gaps in the cellar or on the basement plate. Consisting of a massive gasket with pre-sealed bitumene membrane and plastic nut. May also be used at building edges. Tightness for 6m proofed. Divergence of max. 10% from right angle.

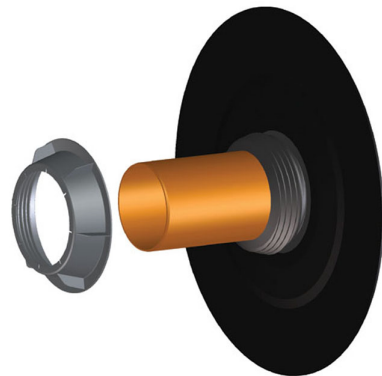

techn. drawing

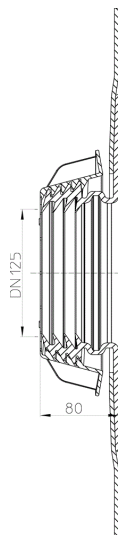

MAIN DATA

spare parts



HL0800.3E
Locknut DN125

TECHNICAL DATA

material	Elastomer/Bitumen/PP	installation height
dimension	DN125	grate frame
capacity		grate
weight	1,8	load class
EAN	9003076028276	inlet
		standards

PACKAGING DATA

carton

unit	1 [pcs.]
weight	2,354 [kg]
EAN/pack.	9003076028276
height/width/depth	93/580/580 [mm]
volume	0,0312852 [m³]

single use pallet

unit	36 [pcs.]
weight	95 [kg]
EAN/pack.	
height/width/depth	1900/800/1200 [mm]
volume	1,824 [m³]

DOWNLOADS

Foto Print	HL800_pr.tif	max.
Foto Web	HL800_B.jpg	640x480/300dpi
Foto Symbol	HL800_gr.jpg	150x150/72dpi
techn. drawing	HL800_125_b.pdf	pdf
CAD	HL800_125_2_a.dxf	dxf
example of use	HL800x125_PZ.pdf	pdf
Video	YouTube Video	