

HL900N


air admittance valve DN110 with integrated double insulation and reduction DN50/75



air admittance valve DN110 for internal venting of soil and waste systems according to EN12380-1 with removable insect screen (easy cleaning), massive rubber membrane, integrated double insulation and reduction DN50/75. Supervisory approval Z-53.5-460.



techn. drawing

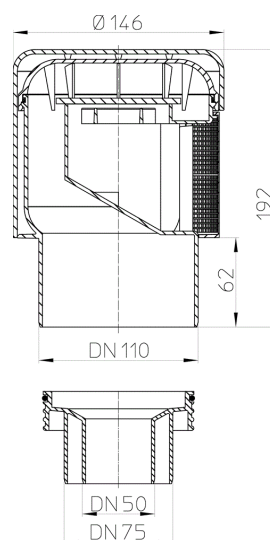

MAIN DATA

spare parts



HL0900.1E
reduction DN50/75



HL01067D
O-ring 92x4mm



HL0900.2E
insect cover

attachment**HL990**
reduction DN75/90**TECHNICAL DATA**

material	PP	installation height	
dimension	DN50/75/110	grate frame	
capacity	37 l/s	grate	
weight	0,485	load class	
EAN	9003076909001	inlet	
		standards	EN12380 A1

PACKAGING DATA**PE-bag**

unit	1 [pcs.]
weight	0,488 [kg]
EAN/pack.	9003076909001
height/width/depth	150/150/200 [mm]
volume	0 [m³]

carton

unit	10 [pcs.]
weight	5,543 [kg]
EAN/pack.	9003076919000
height/width/depth	360/320/640 [mm]
volume	0,073728 [m³]

single use pallet

unit	200 [pcs.]
weight	121 [kg]
EAN/pack.	
height/width/depth	2000/800/1300 [mm]
volume	1,728 [m³]

DOWNLOADS

Foto Print	HL900N_pr.tif	max.
Foto Web	HL900N_B.jpg	640x480/300dpi
Foto Symbol	HL900N_gr.jpg	150x150/72dpi
techn. drawing	HL900N_a.pdf	pdf
CAD	HL900N_2_a.dxf	dxf