

HAIR DRYER

Hair dryer, gun model , push-button with plug

Código: SC0010

General description


- · Warm air hair dryer.
- · Gun-like, connected to the wall-mounted holder.
- · Operated by an on/off switch.
- · Small-size appliance.
- · Highest electrical safety.
- · Suitable for hotel bathrooms.

Components and Materials

- \cdot White ABS hand piece which incorporates polypropylene air concentrator and ON/OFF switch.
- \cdot Cabel and plug from the holder , 1 m length
- \cdot Spiral cord, 650-1.800 m length, from the holder to the hand piece.
- \cdot Wall-mounted holder for permanent installation, incorporates 1 hole for mounting on the wall.
- · Two speed settings
- · Motor, 7.500-10.000 rpm, includes a thermal overload switch.
- · Polycarbonate turbine.

Technical Specifications

Voltage - 220-240 V	Motor power - 40 W
Electrical isolation - clase	Heating element power - 1200
П	W
Frequency - 50 Hz	Consumption - 2,7-4,9 A
Electrical isolation - Clase	RPM - 7.500-10.000
II	Air temperature(10 cm distance /
Dimensions - 150x210x79	21 °C) - 61 °C
mm	Noise level (at 2 m) - 60 dB
Weight - 0,700 Kg	Spiral cordset length -
Effective airflow - 73 m ³ /h/	650-1.800 mm
1.217 l/min	Installation height - 1300-1500
Air velocity - 54 Km/h	mm
Total power - 540-1.240 W	

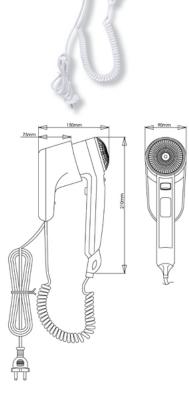

Dim.: ±4%

Operation

Remove gun-like hand piece from holder and move the switch to the ON position. Press the bottom on the handle for its working. Select the speed and direct the hand piece to the hair at your own convenience. Once you are finish, hang the gun-like hand piece in the support and switch to the OFF position.

Certificates & Qualifications

ISO 9001:2008, VDE.

COMPLIANT WITH ELECTRICAL SAFETY DIRECTIVES

Specifications

Warm air hair dryer should be made of white ABS and provided with a wall-mounted holder where it is connected to. The white ABS hand piece should incorporate a polypropylene air concentrator and an ON/OFF switch. The spiral cord should be 650 1.800 mm, with plug from the holder. The wall-mounted holder should incorporate 1 hole for mounting on the wall. Motor, 7.500-10.000 rpm, should include a thermal overload switch. Overall dimensions shall be 150 x 210 x 90 mm. Unit should be VDE approved and CE marked and comply with electrical safety directives 73/23/CEE & 93/68/CEE and electro-magnetic compatibility directives 89/336/CEE & 92/31/CFE.

Hair dryer shall be model SC0010 push-button operated ABS cover, of Mediclinics S.A., C/ Industria 54, E-08025 Barcelona, Spain.

Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.

