

ARTIKAL
Item


K10250

Baterija za tuš kadu sa usponskim tušem
Shower mixer with stand shower

SLIKA PROIZVODA
Product picture



TEHNIČKA SKICA
Technical draft

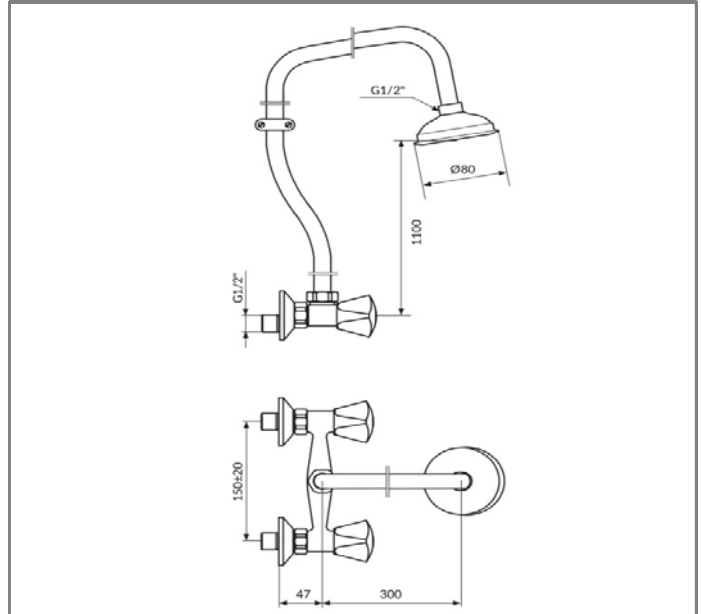

TEHNIČKI PODACI

Dvoručna baterija
Zidna montaža
Regulacija protoka do 5 lit/min na tušu
Kompresioni gornji deo sa masnom komorom 1/2"
Metalni trokraki rukohvat
Usponska cev od mesinga
Tuš ruža od nerđajućeg čelika
Heavy Duty ekscentar kolena
Hromirane rozete
Klasa bučnosti I

TECHNICAL DETAILS

Two handle mixer
Wall mounted
Flow regulation on shower up to 5 lit/min
Compression cartridge with grease chamber 1/2"
Metal triangle handle
Brass stand pipe shower
Stainless steel shower head
Heavy Duty eccentric connectors
Chromed rossettes
Noise level I

RADNI USLOVI

Maksimalni radni pritisak: 5 bar
Preporučeni radni pritisak: 3 bar
Minimalni radni pritisak: 1 bar
Maksimalna dozvoljena temperatura: 80°C
Preporučena temperatura vode: 60°C

WORKING CONDITIONS

Max. working pressure : 5 bar
Suggested working pressure : 3 bar
Min. working pressure : 1 bar
Max. working temperature : 80°C
Suggested max. water temperature : 60°C

www.rosan.rs

Srbija, 24420 Kanjiža, Dušana Popovića 10.

tel.+381 24-876-744 fax +381 24-876-756, info@rosan.rs

KLASIK