


HL64BH


flat-roof drain DN75/110 horizontal with bitumen membrane. Walkable -
148x148mm/137x137mm



flat-roof drain DN75/110 horizontal with insulated drain body, bitumen membrane d 500 mm for perfect and easy lap-joint waterproofing with bituminous membranes, cut-to-size grate frame 12 - 65 mm / 148 x 148 mm and stainless steel grate 137 x 137 mm. Comes with lot cover.

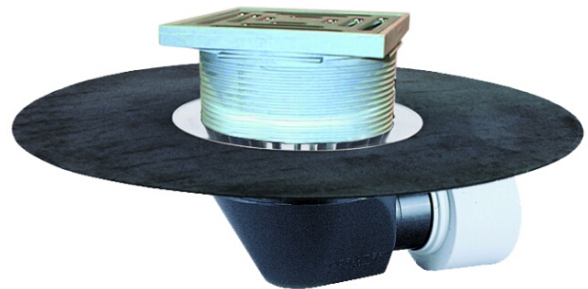

techn. drawing

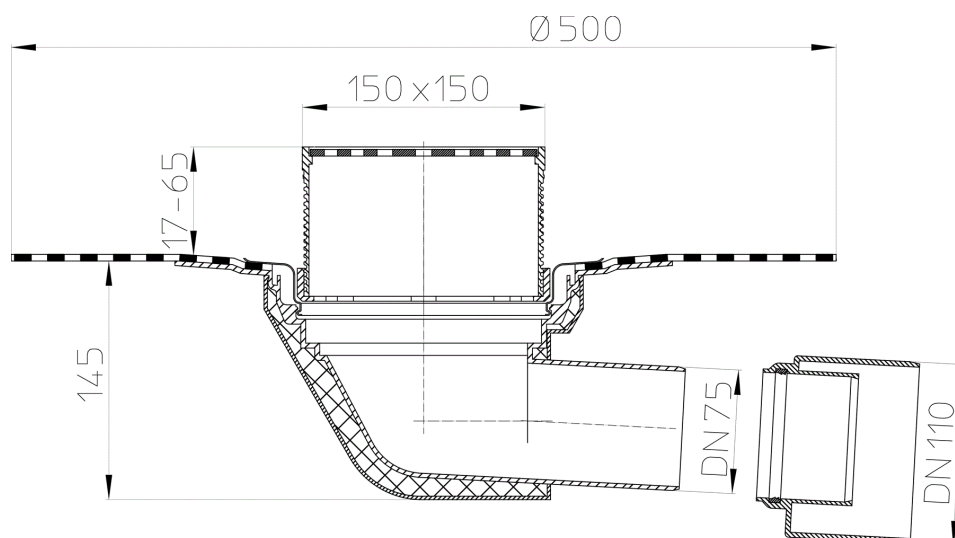

MAIN DATA

spare parts



HL0317.4E
reduction DN110xDN75



HL062B.3E
adapter



HL66.9
grating d 145mm fluted/148x148mm/138x138mm

**HL0317.1E**

stainless steel grate 138x138mm

**HL062B.2E**

grate frame d 145mm/90mm/148x148mm

**HL066.4E**

O-ring 135x2,5mm

attachment**HL160**

gravel guard d 150mm

**HL635**

drainage grating 362x362mm/240x240mm aluminium

**HL66**

grating d 145mm sleek/(316) stainless steel frame 150x150mm/138x138mm (316) secured

**HL01058D**

tailback gasket for stainless steel flange 220x155mm

**HL062B.3E**

adapter

**HL160**

gravel guard d 150mm

**HL66.1**

grating d 145mm sleek/(316) stainless steel frame 150x150mm/138x138mm (316) secured and slip-resistant

**HL01058D**

tailback gasket for stainless steel flange 220x155mm

**HL062B.3E**

adapter

**HL160**

gravel guard d 150mm

**HL67**

grating round d 145mm sleek/(316) stainless steel frame d 155mm/d 145mm

**HL01058D**

tailback gasket for stainless steel flange 220x155mm

**HL062B.3E**

adapter

**HL160**

gravel guard d 150mm

Alternatives**HL64.1BH**

flat-roof drain DN75/110 horizontal with bitumen membrane heated (10-30W/230V). Walkable - 148x148mm/137x137mm

Extensions



HL350
extension 130mm/d 145mm



HL350.1
extension 180mm/d 145mm with flange and waterproofing kit HL84



HL350.1H
extension 180mm/d 145mm with bitumen membrane



HL65
extension 300mm/d 125mm with clamping ring



HL65H
extension 300mm/d 125mm with bitumen membrane



HL65P
extension 345mm/d 125mm with PVC collar

TECHNICAL DATA

material	PP	installation height	167mm
dimension	DN75/110	grate frame	12-65mm/148x148mm
capacity	3,7 l/s	grate	Edelstahl 137x137mm
weight	2,29	load class	K - 300kg
EAN	9003076816422	inlet	
		standards	

PACKAGING DATA

carton

unit	1 [pcs.]
weight	2,74 [kg]
EAN/pack.	9003076816422
height/width/depth	225/385/385 [mm]
volume	0,033350625 [m³]

single use pallet

unit	60 [pcs.]
weight	175 [kg]
EAN/pack.	
height/width/depth	2000/800/1200 [mm]
volume	1,92 [m³]

DOWNLOADS

Foto Print	HL64BH_pr.tif	max.
Foto Web	HL64BH_B.jpg	640x480/300dpi
Foto Symbol	HL64BH_gr.jpg	150x150/72dpi
techn. drawing	HL64BH_b.pdf	pdf
CAD	HL64BH_2_b.dxf	dxf
example of use	HL64BH_PZ.pdf	pdf