


APZ2012-850 Optimal

Shower drain with an edge for perforated grids or tile embedding, without odour trap

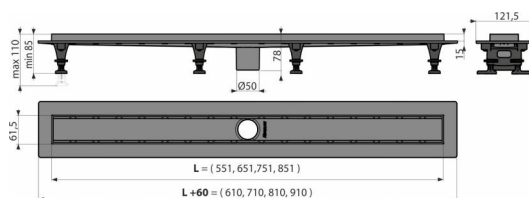

Application

- For wheelchair access
- For connection to the central trap
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For perforated grids
- For full grid SOLID
- For indoor use
- For grid TILE for embedding tiles

Features

- Secure connection to the construction waterproofing system
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Self-adhesive tape for quality waterproofing
- Installation height from 85 mm
- Adjustable plastic anchor legs 0–27 mm allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

Scope of supply

- Fixing hardware for anchoring the adjustable legs: screw 4.2x9.5 – 8 pcs
- Fixation set: screw Ø4.2x38 – 8 pcs, dowel Ø8 – 8 pcs
- Self-adhesive waterproofing tape
- Height adjustable feet 4 pcs
- Linear shower drain

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APZ2012-850	8595580559502	850 mm 1,3051 13,7772 74,8142 kg	920x143x106 930x825x375 mm	14 42 pcs

Warranty	Customs code	Norms
2/6 years *	39229000	EN 1253

Technical specifications

- Total installation height 85-110 mm
- Minimum thickness of concrete 78 mm
- Waste outlet diameter 50 mm
- Flow of the inlet grid >80 l/min
- Load class K3 300 kg